

Datasheet

Wash M series luminaires deliver stunning performances from an extremely compact body. Perfectly meeting the demanding needs of the most creative architectural lighting spaces, these flexible and versatile luminaires are available in a variety of optical configurations and body finishes.

They offer effective lighting performances in various architectural structures with LED color options. They provide control feasibility with the built-in DALI driver option.

Options	Control		
сст	ON/OFF DALI		
2700K, 3000K 1000K, 5000K 1500K			



www.aimtech.com.tr



General Specifications

- With its aluminum extrusion body and tempered glass, it is designed to operate smoothly for many years under harsh environmental conditions.
- It has universal operating voltage of 120/220VAC.
- Control feasibility with the built-in DALI driver option.
- **CCT** options from 2700K to 6500K.



- It provides visual harmony to architectural structures with its body color options.
- It allows versatile use with its compact structure and high efficiency LEDs.
- It is compatible with various architectural structures with its wide lens options.



/2

Technical Specifications

General

Control Color Depth DALI or ON-OFF 256

Physical

Size Body Connections Working Temperature Protection Class (A*) x 60mm x 46mm Aluminium Extrusion IP67 Connector -25°C ~ +50°C IP67

 $\boldsymbol{\ast}~$ Product lengths may vary. For details, see the technical drawing section.

Optical

Luminous Flux Beam Angle (*) 2160lm, 4320lm, 6480lm, 8640lm 10°, 25°, 45°, 60°, 10°x35°, 10°x60°

* Lumen values are given for Wash M 030, Wash M 060, Wash M 090 and Wash M 120, respectively.

Electrical

Power Operating Voltage (*)18W, 36W, 54W, 72W 110/220VAC


* Power values are given for Wash M 030, Wash M 060, Wash M 090 and Wash M 120 at 4000K color temperature and when all LEDs are on at full power, respectively.

Effective solution for historical building lighting with shades of white color







Techbical Drawing

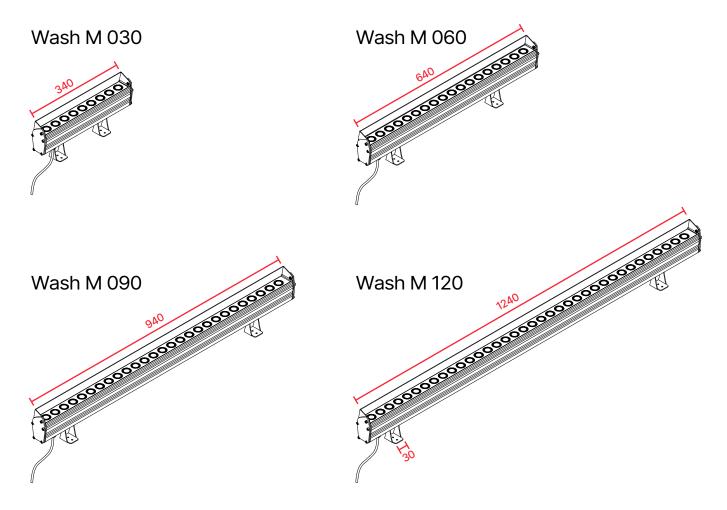

Options



With antiglare



Without antiglare

All dimensions are in millimeters



WASH M DALI/ON-OFF

Accessories

Connection Accessories





Extension cable

Input cable

Mounting Accessories



Mounting bracket



Socket Pliers




M4 Allen Key



/5

Connection Diagram

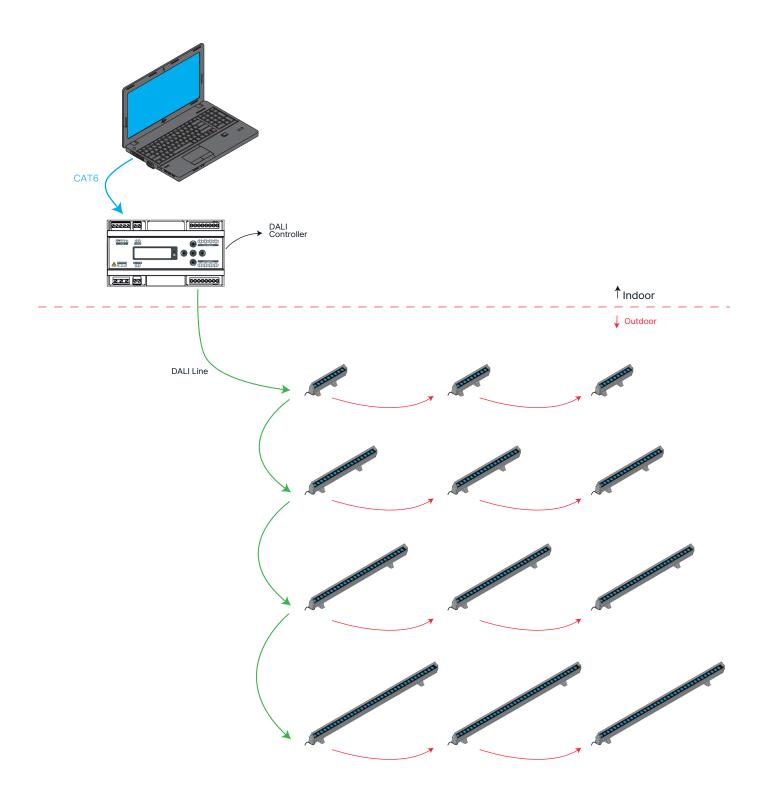



WASH M DALI/ON-OFF