

Wash X DALI/ON-OFF

Datasheet

Wash X series luminaires deliver stunning performances from an extremely compact body. Perfectly meeting the demanding needs of the most creative architectural lighting spaces, these flexible and versatile luminaires are available in a variety of optical configurations and body finishes.

They offer effective lighting performances in various architectural structures with LED color options. They provide control feasibility with the built-in DALI driver option.

Options

CCT

2700K, 3000K
4000K, 5000K
6500K

Control

ON/OFF
DALI



General Specifications

- With its **aluminum extrusion body and tempered glass**, it is designed to operate smoothly for many years under harsh environmental conditions.
- It has universal operating voltage of **120/220VAC**.
- Control feasibility with the **built-in DALI** driver option.
- CCT** options from 2700K to 6500K.
- It provides visual harmony to architectural structures with its **body color options**.
- It allows versatile use with its **compact structure and high efficiency LEDs**.
- It is compatible with various architectural structures with its **wide lens options**.



Technical Specifications

General

Control	DALI or ON-OFF
Color Depth	256

Physical

Size	(A*) x 60mm x 75mm
Body	Aluminium Extrusion
Connections	IP67 Connector
Working Temperature	-25°C ~ +50°C
Protection Class	IP67

* Product lengths may vary. For details, see the technical drawing section.

Optical

Luminous Flux	(*) 2160lm, 4320lm, 6480lm, 8640lm
Beam Angle	10°, 25°, 45°, 60°, 10°x35°, 10°x60°

* Lumen values are given for Wash X 030, Wash X 060, Wash X 090 and Wash X 120, respectively.

Electrical


Power	(*)18W, 36W, 54W, 72W
Operating Voltage	110/220VAC

* Power values are given for Wash X 030, Wash X 060, Wash X 090 and Wash X 120 at 4000K color temperature and when all LEDs are on at full power, respectively.


**Effective solution for historical building
lighting with shades of white color**

Technical Drawing


Wash X 030

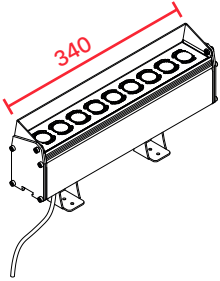


Wash X 060

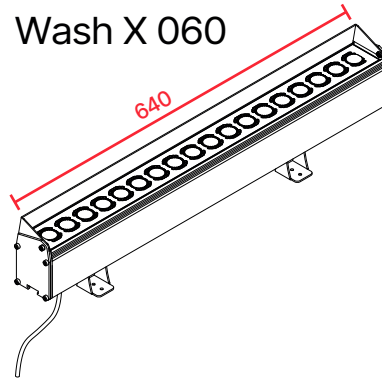


Wash X 090

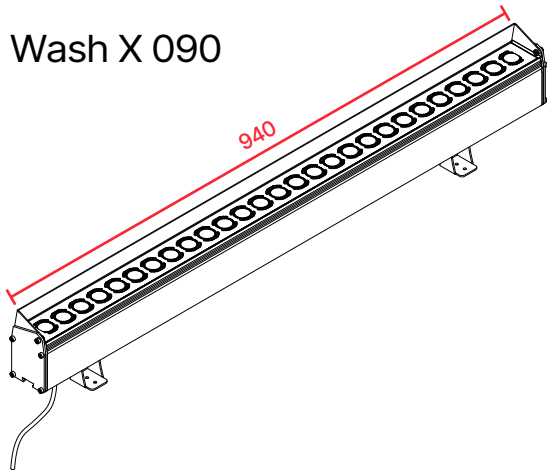


Wash X 120

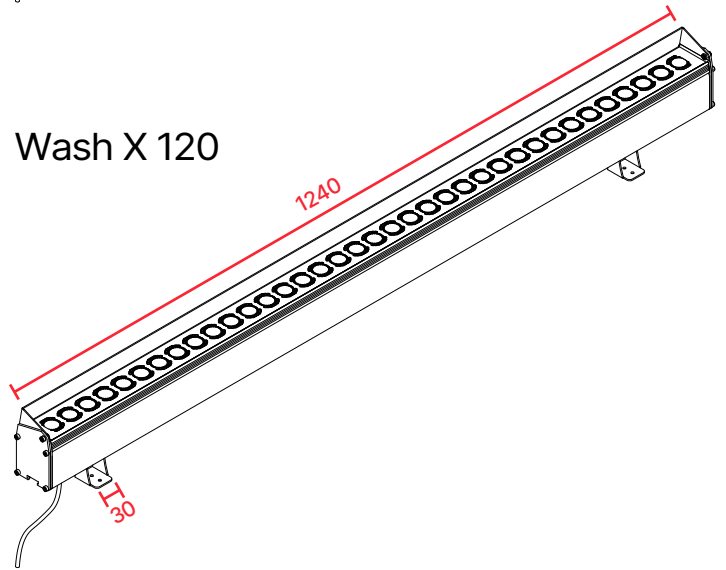

Options

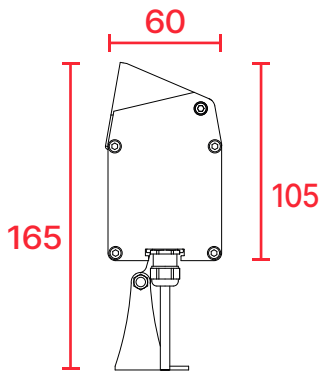

With antiglare

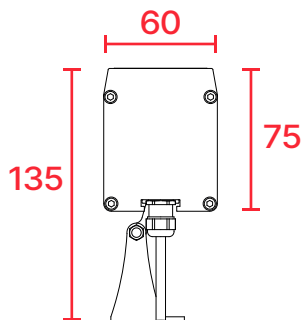

Without antiglare

All dimensions are in millimeters

Accessories

Connection Accessories



Extension cable



Input cable


Mounting Accessories



Mounting bracket



Socket Pliers



M4 Allen Key

Connection Diagram

